

SCS 3450 UP / SCS 3600 UP / SCS 3800 UP / SCS 3950 UP



## Efficient

- Up to 4 inverters can be transported in one standard shipping container
- Higher power density

## Robust

- Intelligent air cooling system OptiCool for efficient cooling
- Suitable for outdoor use in all climatic ambient conditions worldwide

## Flexible

- One device for all applications
- Stand-alone device or turnkey solution with SMA medium-voltage system

## Versatile

- Integrated battery communication
- Customized monitoring and control of inverters
- Grid management functions for dynamic grid support
- Integrated voltage supply for internal consumption and external loads

## SUNNY CENTRAL STORAGE UP

Battery inverter for large-scale storage systems

With an output of up to 3960 kVA and system voltages up to 1500 V DC, the SMA Sunny Central Storage allows for more efficient and flexible system design for battery power plants. A separate voltage supply and additional space are available for the installation of customer equipment. The intelligent cooling system OptiCool ensure smooth operation even in extreme ambient temperature.

# SUNNY CENTRAL STORAGE UP

Technical Data	SCS 3450 UP	SCS 3600 UP
<b>Battery side (DC)</b>		
Operating DC voltage range $V_{DC}$	880 V to 1500 V	921 V to 1500 V
Max. DC current $I_{DC, max}$	4750 A	
Fuse characteristic for battery connection - pre-arcing integral limit single DC busbar / split DC busbar <sup>12) 14)</sup>	10.75 MA <sup>2</sup> s / 8.0 MA <sup>2</sup> s	
Single DC busbar 26 connections per pole / split DC busbar 6/5/6 connections per pole	● / ○	
DC connection	with terminal lug	
<b>Grid side (AC)</b>		
Nominal AC power at 1200 Vdc and $\cos \varphi = 1.0$ (at 25 °C)	3450 kW	3620 kW
AC apparent power at 1200 Vdc (at 25 °C / at 40 °C / at 50 °C) <sup>3) 13)</sup>	3450 kVA / 3140 kVA / 2930 kVA	3620 kVA / 3290 kVA / 3075 kVA
Max. AC current $I_{AC, max}$ (at 25 °C / at 40 °C / at 50 °C)	3320 A / 3020 A / 2820 A	3320 A / 3020 A / 2820 A
Max. total harmonic distortion	< 3% at nominal power	
Nominal AC voltage / AC voltage range <sup>1) 8)</sup>	600 V / 480 V to 720 V	630 V / 504 V to 756 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz > 2	
Min. short-circuit ratio at the AC terminals <sup>9)</sup>	1 / 0.0 overexcited to 0.0 underexcited	
Cos Phi at rated power / displacement Cos Phi adjustable <sup>8) 10)</sup>	with busbar system (three busbars, one per line conductor)	
AC connection		
<b>Efficiency</b>		
Max. efficiency <sup>2)</sup>	98.8%	
<b>Protective Devices</b>		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection (optional)	Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Insulation monitoring	●	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP54 / IP34 / IP34	
<b>General Data</b>		
Dimensions (W / H / D)	2780 / 2318 / 1588 mm (109.4 / 91.3 / 62.5 inch)	
Weight	< 3700 kg / < 8200 lb	
Self-consumption (max. <sup>4)</sup> / partial load <sup>5)</sup> / average <sup>6)</sup>	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal (8.4 kVA transformer) / external auxiliary power supply	● / ○	
Noise emission <sup>7)</sup>	65.0 dB(A)	
Operating temperature range (optional) <sup>8)</sup>	(-40 °C) -25 °C to 60 °C / (-40 °F) -13 °F to 140 °F	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL <sup>9)</sup> 1000 m / 2000 m <sup>11)</sup>	● / ○	
Fresh air consumption	6500 m <sup>3</sup> /h	
<b>Features</b>		
Grid forming / black start ready	○ / ○	
Communication	Ethernet, Modbus Master, Modbus Slave	
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1 / -2, AR-N 4110 / 4120, Arrêté du 23/04/08 IEC 61000-6-2, EN 55011, CISPR11	
EMC standards		
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
Type designation	SCS 3450 UP	SCS 3600 UP

● Standard features ○ Optional – Not available

- 1) At nominal AC voltage, nominal AC power decreases in the same proportion
- 2) Efficiency measured without internal power supply
- 3) AC apparent power at higher dc voltages on request
- 4) Self-consumption at rated operation
- 5) Self-consumption at < 75% Pn at 25 °C
- 6) Self-consumption averaged out from 5% to 100% Pn at 25 °C
- 7) Sound pressure level at a distance of 10 m
- 8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets

- 9) A short-circuit ratio of < 2 requires a special approval from SMA
- 10) Max. power values (S/P/Q) can be requested based on project specific design
- 11) Earlier temperature-dependent de-rating and reduction of DC open-circuit voltage
- 12) Battery short circuit disconnection has to be done on the battery side with ultra rapid battery string or group fuses, e.g. fuse type aR/aBat & DC time constant Tau (L/R) <= 1 ms
- 13) Depending on the ratio of reactive power (cos φ), an extended power derating may occur
- 14) Please check the manual for further information


Technical Data	SCS 3800 UP	SCS 3950 UP
<b>Battery side (DC)</b>		
Operating DC voltage range V <sub>DC</sub>	962 V to 1500 V	1003 V to 1500 V
Max. DC current I <sub>DC, max</sub>	4750 A	
Fuse characteristic for battery connection - pre-arcing integral limit single DC busbar / split DC busbar <sup>12) 14)</sup>	10.75 MA <sup>2</sup> s / 8.0 MA <sup>2</sup> s	
Single DC busbar 26 connections per pole / split DC busbar 6/5/6 connections per pole	● / ○	
DC connection	with terminal lug	
<b>Grid side (AC)</b>		
Nominal AC power at 1200 Vdc and cos φ = 1.0 (at 25 °C)	3800 kW	3960 kW
AC apparent power at 1200 Vdc (at 25 °C / at 40 °C / at 50 °C) <sup>3) 13)</sup>	3800 kVA / 3455 kVA / 3230 kVA	3960 kVA / 3610 kVA / 3365 kVA
Max. AC current I <sub>AC, max</sub> (at 25 °C / at 40 °C / at 50 °C)	3320 A / 3020 A / 2820 A	3320 A / 3020 A / 2820 A
Max. total harmonic distortion	< 3% at nominal power	
Nominal AC voltage / AC voltage range <sup>1) 8)</sup>	660 V / 528 V to 759 V	690 V / 552 V to 759 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz > 2	
Min. short-circuit ratio at the AC terminals <sup>9)</sup>	1 / 0.0 overexcited to 0.0 underexcited	
Cos Phi at rated power / displacement Cos Phi adjustable <sup>8) 10)</sup>	with busbar system (three busbars, one per line conductor)	
AC connection		
<b>Efficiency</b>		
Max. efficiency <sup>2)</sup>	98.8%	
<b>Protective Devices</b>		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection (optional)	Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Insulation monitoring	●	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP54 / IP34 / IP34	
<b>General Data</b>		
Dimensions (W / H / D)	2780 / 2318 / 1588 mm (109.4 / 91.3 / 62.5 inch)	
Weight	< 3700 kg / < 8200 lb	
Self-consumption (max. <sup>4)</sup> / partial load <sup>5)</sup> / average <sup>6)</sup>	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal (8.4 kVA transformer) / external auxiliary power supply	● / ○	
Noise emission <sup>7)</sup>	65.0 dB(A)	
Operating temperature range (optional) <sup>8)</sup>	(-40 °C) -25 °C to 60 °C / (-40 °F) -13 °F to 140 °F	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL <sup>9)</sup> 1000 m / 2000 m <sup>11)</sup>	● / ○	
Fresh air consumption	6500 m <sup>3</sup> /h	
<b>Features</b>		
Grid forming / black start ready	○ / ○	
Communication	Ethernet, Modbus Master, Modbus Slave	
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1 / -2, AR-N 4110 / 4120, Arrêté du 23/04/08	
EMC standards	IEC 61000-6-2, EN 55011, CISPR11	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
Type designation	SCS 3800 UP	SCS 3950 UP

● Standard features ○ Optional – Not available

## SYSTEM DIAGRAM

- DC
- AC
- Modbus TCP
- SMA scope
- Customer scope

\*with own BMS

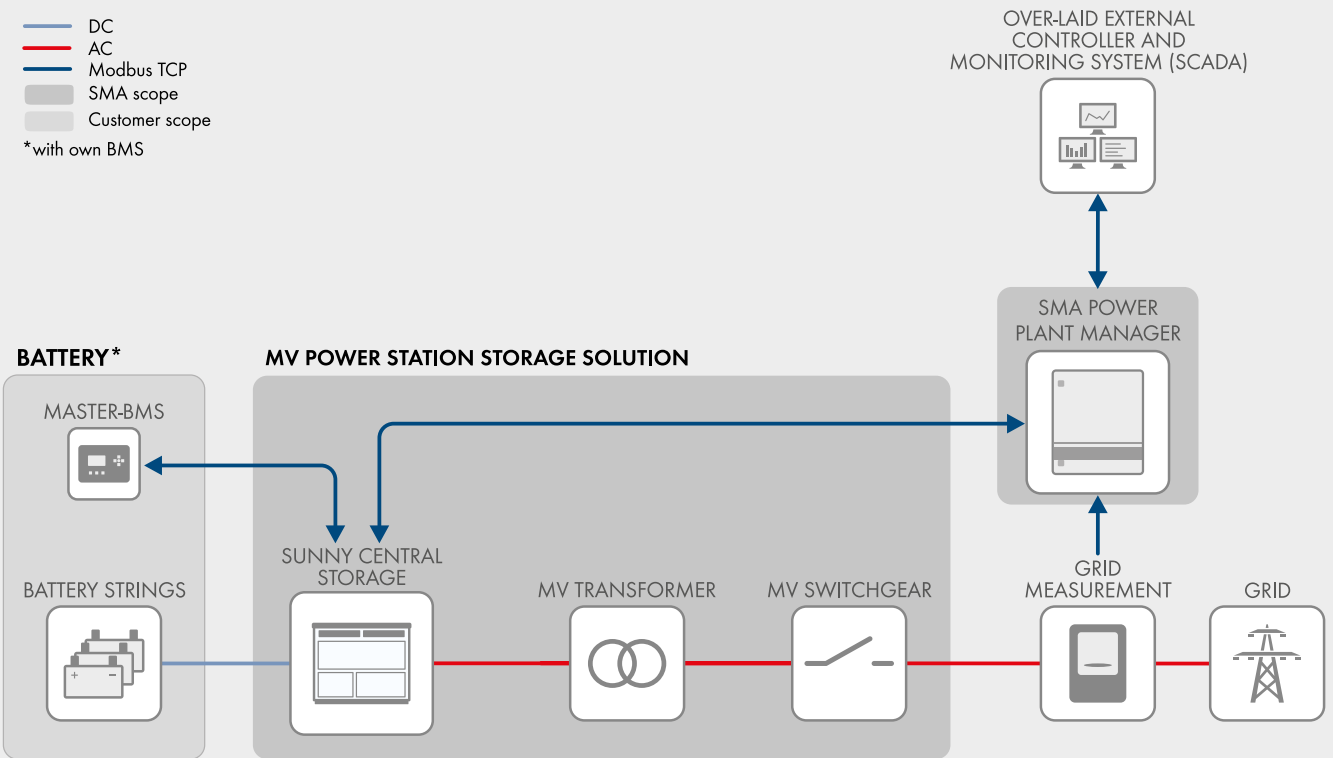

### Grid-connected functions

- Setpoints for active and reactive power
- Static grid support Q(U), P(f)
- Dynamic grid support (FRT)
- Active islanding detection (AID)
- High compatibility with different battery types

### Compatible with energy management system functionalities

- External static grid supporting functions
- Ramp-rate control of PV power
- Peak shaving
- Energy shifting
- Genset optimization control
- Reducing necessary spinning reserve of gensets
- Battery start-up and stop sequence
- Operates the battery within optimal operation window
- Grid Forming
- Black Start