



mit Speicherband
with storage belt conveyor

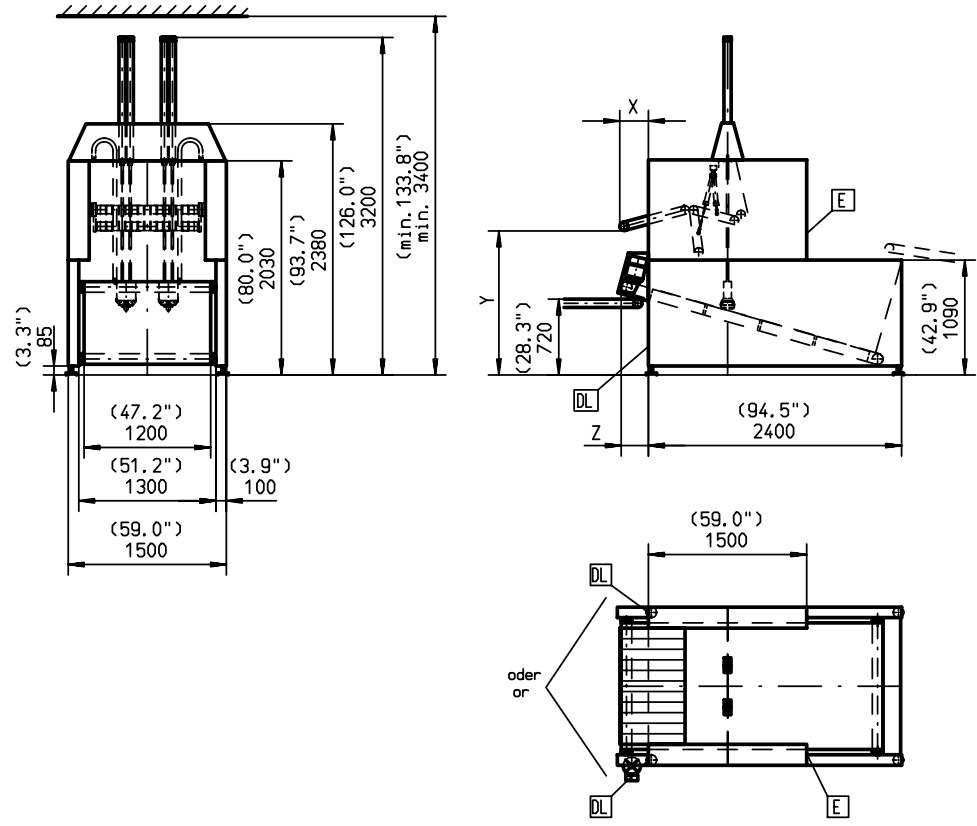

mit Trichter und Speicherband
with funnel and storage belt conveyor

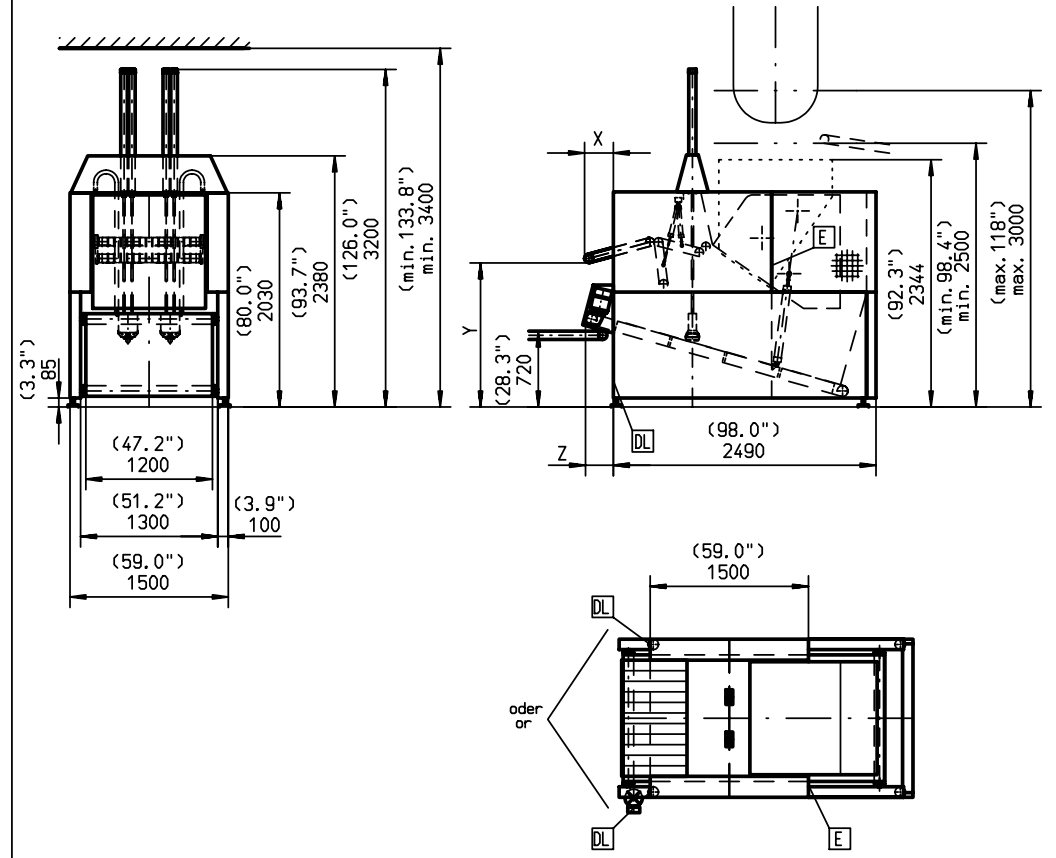

Auslegerlänge Length of extended conveyor	X _{min} mm (inch)	X _{max} mm (inch)	Y _{min} mm (inch)	Y _{max} mm (inch)	Z mm (inch)
550 (22.0")	240 (9.4")	270 (10.6")	1250 (49.2")	1670 (65.7")	255 (10.0")
750 (30.0")	440 (17.3")	470 (18.5")	1150 (45.3")	1720 (67.7")	455 (17.9")
1000 (40.0")	690 (27.2")	720 (28.3")	1025 (40.4")	1785 (70.3")	705 (27.7")

Einbringmaße Dimensions to be observed for transport and installation		DL	Druckluftanschluß Compressed-air connection Connexion d'air comprimé
Höhe / Height	>2200 mm >86.6 inch	E	Elektrischer Anschluß Electrical connection Connexion électrique
Breite / Width	>1600 mm >63.0 inch	Konstruktionsänderungen vorbehalten Subject to technical alterations Sous réserve de modifications techniques	

Dimensions			Kannegiesser®		
Separating machine			PU 12-U		
			Page		1.2-3
			PU 12		0206
1		(mm)	Basic machine	and 2 beltconveyor before, 1 behind PU	and 2 beltconveyor before, 2 behind PU
2	Dimensions				
3	Length	mm	2400/2490		
4	Width	mm	1500		
5	Height	mm	3200		
6					
7	Weight				
8	Total Weight	kg	735		
9	Floor load per foot	kN/m²	234		
10	Floor load machine	kN/m²	2,28		
11					
12	Electric (E)				
13	Connected load	kW	1,8	3	4
14	Current consumption 230V	A	8	16	19
15	Current consumption 400V	A	5	10	11
16	Consumption (approx.)	kW	0,6	1,2	1,3
17					
18	Compressed air (DL)				
19	Operat.pressure	bar	6,5		
20	connection	DN	15		
21	consumption per piece	Nm³/h*	42		
22					
23					
24	* p = 1 bar, t = 20°C				
25					
26					
27					
28					
29					
30	Noise level	dB(A)	75		